Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: DOMUS LINE

Supplier's address: Service, Elf Stücken 25, 49324 Melle, DE

Model identifier: Perl D-M

Type	of	light	source:

LED	Non-directional or directional:	NDLS
SOLDER PADS		
or CONNECTOR		
NMLS	Connected light source (CLS):	No
No	Envelope:	-
No		
No	Dimmable:	Only with spe- cific dimmers
	SOLDER PADS or CONNECTOR NMLS	directional: SOLDER PADS or CONNECTOR NMLS Connected light source (CLS): No Envelope: No


Product parameters

Product parameters							
Parameter	Parameter		Parameter	Value			
General product parameters:							
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		3	Energy efficiency class	F			
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°2), in a wide cone (120°2) or in a narrow cone (90°2)		300 in Sphere (360°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	27006500			
On-mode power (Pon), ex- pressed in W		3,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	-			
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal			Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			
Outer dimensions without separate control gear, lighting control parts and nonlighting control parts, if any (millimetre)	Height	8	Spectral power dis-	See image			
	Width	48	tribution in the range 250 nm to 800 nm, at full-load	in last page			
	Depth	48					
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-			
			Chromaticity coordi- nates (x and y)	0,439 0,408			
Parameters for	LED and OLED lig	ht sources:					
R9 colour rendering index value		10	Survival factor	0,90			

(a)_{'-'} : not applicable;

the lumen maintenance factor

(b):_': not applicable;

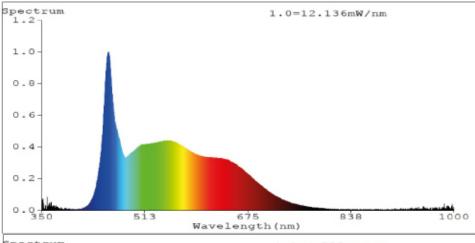

0,96

